


570T

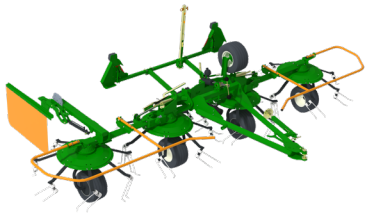

Specifications

- Work Width: 5.74m (18.7ft)
- Transport Width: 2.78m (9.5ft)
- Transport Height: 2.6m (9ft)
- Weight: 830kg (1830lbs)
- Power: 53kw (70hp)
- PTO Speed: 540rpm
- No. of Rotors: 4
- Rotor Diameter: 1.6m (5.5ft)
- Tines per rotor: 7
- 2 x Single acting float ram


840T-U



Specifications

- Work Width: 8.4 m (27.6ft)
- Transport Width: 2.9 m (10ft)
- Transport Height: 2.7 m (9ft)
- Weight: 2280kg (5027lbs)
- Power: 60kw (80 hp)
- PTO Speed: 540rpm
- No. of Rotors: 6
- Rotor Diameter: 1.6m (5.5ft)
- Tines per rotor: 7
- 1 x Double acting lift ram
- 2 x Double acting float ram

1120T-U

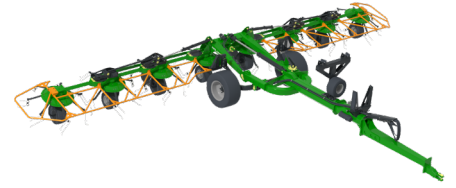

Specifications

- Work Width: 11.2m (36.7ft)
- Transport Width: 3.0m (10ft)
- Transport Height: 2.7 m (9ft)
- Weight: 2860kg (6305.5lbs)
- Power: 60kw (80hp)
- PTO Speed: 540rpm
- No. of Rotors: 8
- Rotor Diameter: 1.6m (5.5ft)
- Tines per rotor: 7
- 1 x Double acting lift ram
- 4 x Double acting float ram

Features

- Double Hook Tines
- Headland Management curtain
- Kennifix hydraulic connections
- Height Adjustment
- Rear Lights
- Spare Wheel

